

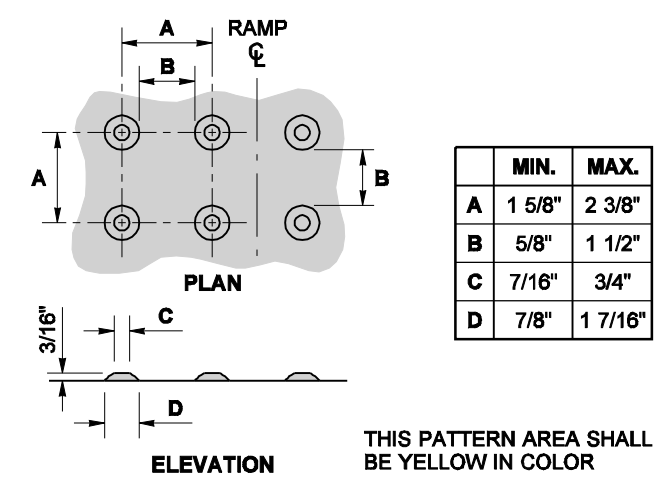





NOTES

1. The bottom of the ramp shall have a level area (not in excess of 2% in any direction), 4' x 4'.
2. Layouts 1, 2, & 3 require two (2) of this bid item: "Cement Conc. Sidewalk Ramp Type 1". The bid item does not include the adjacent Curb (or Curb & Gutter), or Sidewalk.
3. Ramp slopes shall not be steeper than 12H:1V.
4. Avoid placing drainage structures, junction boxes or other obstructions in front of ramp access areas.
5. Curb & Gutter is shown, see the Contract Plans for the curb design specified. See Standard Plan F-10.12 for curb details.
6. See Standard Plan F-30.10 for sidewalk joint placement and details.



SIDEWALK RAMP TYPE 1 WITH LAYOUTS **STANDARD PLAN F-40.10-00**

SHEET 1 OF 1 SHEET

APPROVED FOR PUBLICATION

Ken L. Smith 02-07-07
STATE DESIGN ENGINEER DATE

Washington State Department of Transportation

DRAWN BY: MARK SUJKA